

www.fogelusa.com



Vertical Beer Frosters

- Thermoformed illuminated header
- Electronic thermostat with digital thermometer to show consumer the temperature inside the cabinet
- Heavy duty hinges with automatic return
- Built-in Door Handle
- Full color decals to attract consumers at the point of sale
- Modern high impact plastic front grill
- Double Curved Glass door (FROSTER 280C)
- Curved foamed-in-place door made of galvanized steel (FROSTER 280)
- UL Classified to ANSI/NSF 7
- Heavy duty condensing unit for R-134a located if front for easy access maintenance
- Forced air condenser
- Forced Air Evaporator for quick temperature



Model No.	Description	Size DxLxH	Voltage	Amps	HP	Cubic Feet	Est. Ship Wt
Froster-B-280-US	1 Door/4 Shelves	27.375" x 28.375" x 79"	115	6.5	1/3	18	235#
Froster-B-280G-US	1 Glass Door/4 Shelves	25.75" x 28.375" x 79"	115	7.5	1/3	18	235#
Froster-B-280C-US	1 Crv'd Glass Door/4 Shelves	28.5" x 28.375" x 79"	115	8.0	1/3	18	235#

Fogel USA

831 Easy Cayuga St • Philadelphia, PA 19124 • 1-800-344-8222 • 1-215-464-6800
 Fax: 1-215-969-4890 • Email: sales@fogelusa.com • www.fogelusa.com

Excell Marketing Group

Vertical Froster Series



Technical Data

Model #	Froster-280-CF	Froster-280G-US	Froster-280C-US
Outside Dimensions			
Depth	27.375"	25.75"	28.375"
Length	28.375"	28.375"	28.375"
Height	79"	79"	79"
Door Size	28.31" x 55.5"	28.31" x 55.5"	28.31" x 55.5"
Door Type	1 solid swing	1 straight glass swing	1 curved glass swing
Inside Dimensions			
Depth	21.75"	21.75"	21.75"
Length	23.5"	23.5"	23.5"
Height	61.5"	61.5"	61.5"
Shelf Size	23"X19.5"	23"X19.5"	23"X19.5"
# of Shelves	4	4	4
# of 12oz. bottles	280	280	280
Capacity: Cubic Foot	18	18	18
Specifications			
Operating Temperature	23°F-34°F	23°F-34°F	23°F-34°F
Refrigerant	R-134a	R-134a	R-134a
Compressor Size HP	1/3	1/3	1/3
Defrost	3 @ 30 min.	3 @ 30 min.	3 @ 30 min.
Voltage	115	115	115
Amperage	6.5	7.5	8.0
Cord and Plug	yes	yes	yes
Shipping Dimensions			
Depth	28"	26.5"	29"
Length	29"	29"	29"
Height	81.75"	81.75"	81.75"
Gross Weight lbs.	235	235	235
Cubic feet	38	36	39

- Cases are designed to operate at 75° Fahrenheit and 55% relative humidity.
- Specification subject to change without notice.




831 E Cayuga Street, Philadelphia, PA 19124 USA • (215) 464-6800 • 1-800-344-8222
 Fax (215) 969-4890 • E-Mail: sales@fogelusa.com • www.fogelusa.com

FOGEL GROUP USA, LLC



Froster-280-CF Side View - Plan View

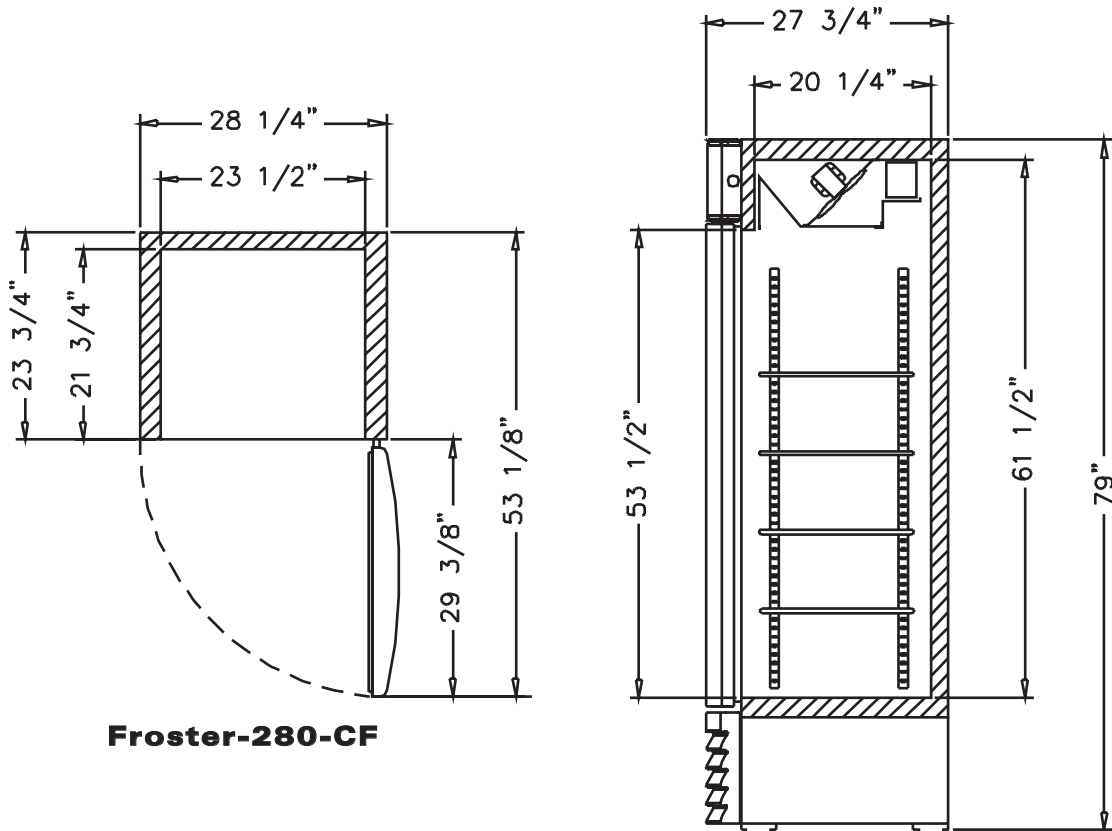

Froster-280-CF

• Specification subject to change without notice.


FOGEL GROUP USA, LLC

831 E Cayuga Street, Philadelphia, PA 19124 USA • (215) 464-6800 • 1-800-344-8222
Fax (215) 969-4890 • E-Mail: sales@fogelusa.com • www.fogelusa.com





Froster-280G-US and Froster-280C-US Side View - Plan View

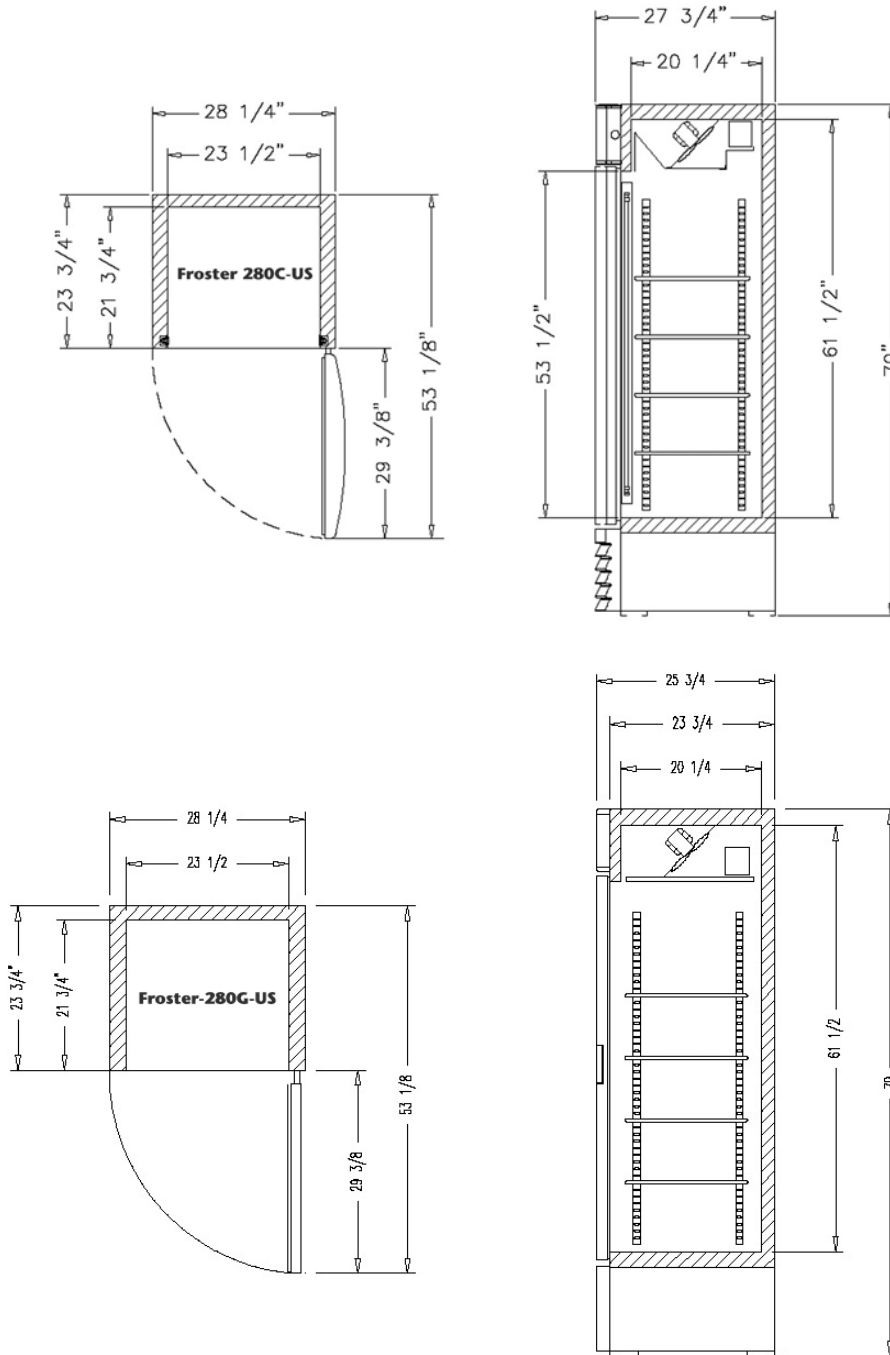

• Specification subject to change without notice.

FOGEL GROUP USA, LLC

831 E Cayuga Street, Philadelphia, PA 19124 USA • (215) 464-6800 • 1-800-344-8222
Fax (215) 969-4890 • E-Mail: sales@fogelusa.com • www.fogelusa.com

