

KM-1900S_H(3)

STACKABLE ICE CUBER

Item # _____

Project: _____

Qty: _____

*AutoCad available on KCL

KM-1900S_H(3)


9/10

Item # 13234


CUBER DIMENSIONS

W x D x H


KM-1900S_H(3)
48 x 27^{3/8} x 36^{7/16}




B-800



B-900



B-800



B-900

Also available on Large Bins:
B-1150SS
B-1300SS
B-1500SS
B-1650SS

KM-1900SAH

Air-Cooled 1 Phase
Shown on an optional
B-900

KM-1900SAH3

Air-Cooled 3 Phase

KM-1900SWH

Water-Cooled 1 Phase

KM-1900SWH3

Water-Cooled 3 Phase



KM-1900SRH

Remote Air-Cooled 1 Phase

KM-1900SRH3

Remote Air-Cooled 3 Phase



- Up to 1965 lbs. of ice production per 24 hours
- Durable stainless steel exterior
- Protected by *HoshiGuard* Antimicrobial Agent **HOSHIGUARD**
- CycleSaver® design 
- EverCheck® alert system 
- Individual crescent cube
- Stainless steel evaporator
- Stackable for 3930 lbs. per 24 hour ice production in the same floor space
- Removable air filters (Air-cooled model only)
- R-404A Refrigerant
- Complies with California Energy Commission guidelines (CEC)

* The KM-1900SAH, KM-1900SAH3, KM-1900SRH and KM-1900SRH3 are ENERGY STAR qualified.

Warranty

Valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact factory for warranty in other countries.

Three Year - Parts & Labor on entire machine.

Five Year - Parts & Labor on: Evaporator.

Five Year - Parts on: Compressor, air-cooled condenser coil.



ISO 9001-5:2008

© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269

TEL 1-800-438-6087

FAX 1-800-345-1325

www.hoshizaki.com



KM-1900S_H(3) STACKABLE ICE CUBER

DIMENSIONS
W x D x H
KM-1900S_H(3)
48 x 27^{3/8} x 36^{7/16}

STACKABLE ICE CUBER

- Air-cooled 1 phase / Air-cooled 3 phase
- Water-cooled 1 phase / Water-cooled 3 phase
- Remote Air-cooled 1 phase / Remote Air-cooled 3 phase

AIR - COOLED 1 PHASE / 3 PHASE

| Water Temp ° F. | 50° | 70° | 90° |
|-------------------|-------------|-------------|-------------|
| Air Temp ° F. 70° | 1867 / 1859 | 1777 / 1763 | 1638 / 1633 |
| Air Temp ° F. 80° | 1798 / 1786 | 1659 / 1636 | 1511 / 1507 |
| Air Temp ° F. 90° | 1777 / 1763 | 1560 / 1530 | 1413 / 1398 |

WATER - COOLED 1 PHASE / 3 PHASE

| Water Temp ° F. | 50° | 70° | 90° |
|-------------------|-------------|-------------|-------------|
| Air Temp ° F. 70° | 1876 / 1825 | 1868 / 1822 | 1734 / 1693 |
| Air Temp ° F. 80° | 1870 / 1823 | 1858 / 1818 | 1655 / 1619 |
| Air Temp ° F. 90° | 1868 / 1822 | 1850 / 1814 | 1673 / 1642 |

REMOTE AIR - COOLED 1 PHASE / 3 PHASE

| Water Temp ° F. | 50° | 70° | 90° |
|-------------------|-------------|-------------|-------------|
| Air Temp ° F. 70° | 1915 / 1965 | 1827 / 1876 | 1676 / 1708 |
| Air Temp ° F. 80° | 1848 / 1897 | 1712 / 1758 | 1543 / 1566 |
| Air Temp ° F. 90° | 1827 / 1876 | 1616 / 1660 | 1451 / 1474 |

UTILITY CONSUMPTION

| Model Number | Ice Production Per Cycle | | KWH per 100 LBS. | Potable Water Gal. per 100 lbs. | Condenser Water Gal. per 100 lbs. |
|--------------|--------------------------|-------|------------------|---------------------------------|-----------------------------------|
| | Lbs. | Cubes | | | |
| KM-1900SAH | 45.3 | 2160 | 4.1 | 18.8 | N/A |
| KM-1900SAH3 | 45.5 | 2160 | 4.1 | 17.0 | N/A |
| KM-1900SWH | 47.0 | 2160 | 3.1 | 18.8 | 99 |
| KM-1900SWH3 | 45.4 | 2160 | 3.3 | 18.8 | 99 |
| KM-1900SRH | 46.3 | 2160 | 3.9 | 20.0 | N/A |
| KM-1900SRH3 | 46.5 | 2160 | 4.1 | 20.0 | N/A |

SPECIFICATIONS





| Model Number | Condenser | Amperage | Min. Circuit Ampacity | Shipping Weight |
|--------------|-------------------|----------|-----------------------|-----------------|
| KM-1900SAH | Air-Cooled | 14.4 | 30 | 415 lbs. |
| KM-1900SAH3 | Air-Cooled | 8.6 | 20 | 415 lbs. |
| KM-1900SWH | Water-Cooled | 12.5 | 30 | 415 lbs. |
| KM-1900SWH3 | Water-Cooled | 8.4 | 20 | 415 lbs. |
| KM-1900SRH | Remote Air-Cooled | 14.9 | 30 | 415 lbs. |
| KM-1900SRH3 | Remote Air-Cooled | 11.0 | 20 | 415 lbs. |

STORAGE BINS


| Model Number | Application Capacity | ARI-Rated Capacity |
|--------------|----------------------|--------------------|
| B-800 | 800 lbs. | 600 lbs. |
| B-900 | 900 lbs. | 660 lbs. |
| B-1150 | 1150 lbs. | N/A |
| B-1300 | 1275 lbs. | N/A |
| B-1500 | 1490 lbs. | N/A |
| B-1650 | 1605 lbs. | N/A |

ELECTRICAL & PLUMBING/KM-1900S_H(3)

- KM-1900SAH / SVWH / SRH
 • 208 - 230V/60/1ø (3 wire with neutral for 115V)
 • 30 amp Max Fuse/HACR Breaker Size
 KM-1900SAH3 / SVWH3 / SRH3
 • 208 - 230V/60/3ø
 • 20 amp Max Fuse/HACR Breaker Size
 • 1/2" OD copper or equivalent independent potable water supply
 • 3/4" FPT independent drain connection

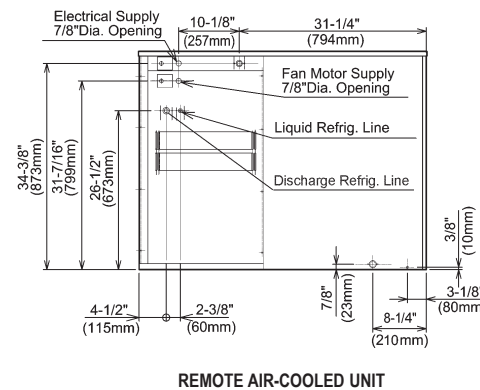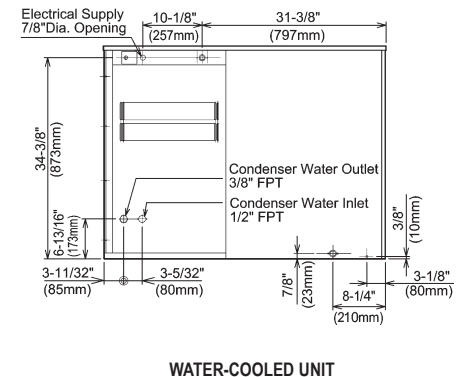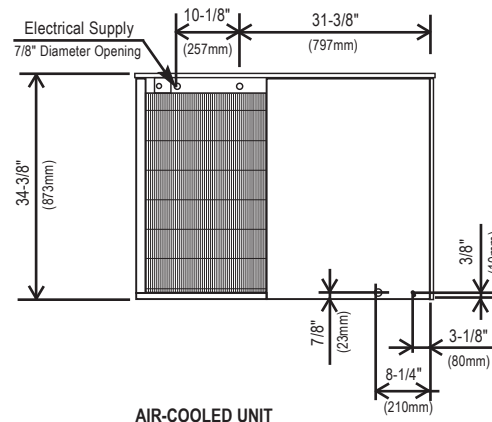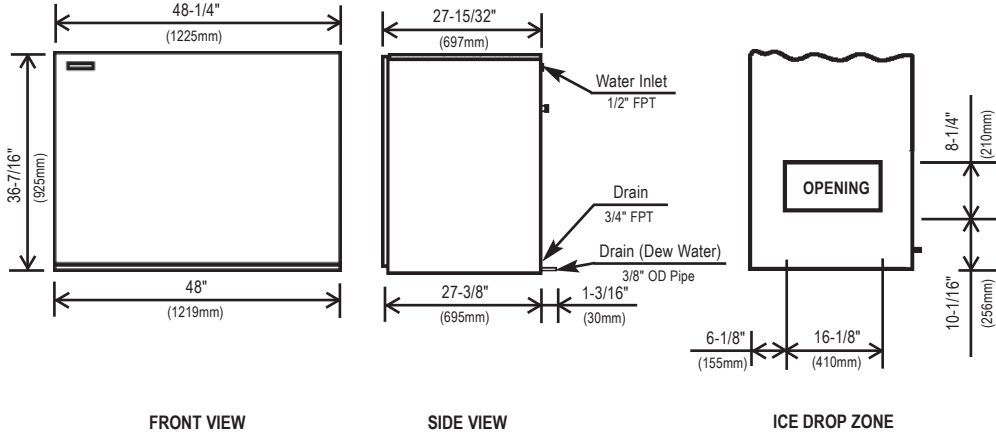

URC-21F Remote Condenser (Sold Separately)
 For Use with KM-1900SRH / KM-1900SRH3

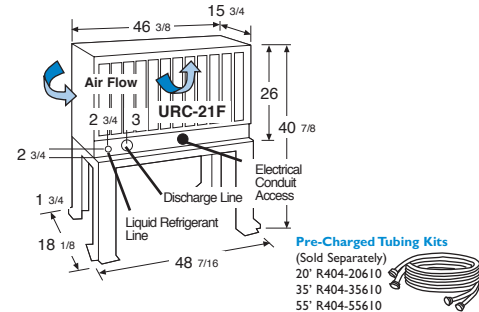

Pre-Charged Tubing Kits (Sold Separately)
 20' R404-20610
 35' R404-35610
 55' R404-55610

Voltage supply for the URC Remote Condenser is supplied from the Ice Maker. No additional circuit is required.

OPERATING LIMITS

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113psig
- Voltage Range 187 - 253V

SERVICE

- Panels easily removed and all components accessible for service.
- Removable/cleanable air filters (Air-cooled model only)

CONDENSING UNIT

- Voltage Range 104 - 127V
- Ambient Temp Range -20 - 122°F



© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269

TEL 1-800-438-6087
 Excel Marketing Group

FAX 1-800-345-1325

www.hoshizaki.com

Printed in U.S.A.

