

MAXX COLD *X-series*

Project Name:	
Location:	
Item:	Qty.:
Model:	

Merchandisers

MODELS



▶MXM1-12R
▶MXM1-12F

▶MXM1-16R
▶MXM1-16F

▶MXM1-23R
▶MXM1-23F

▶MXM2-48R
▶MXM2-48F



▶MXM2-48RS

▶MXM3-72R
▶MXM3-72F


FEATURES

Maxx Cold X Series Merchandisers are designed for durability and visual appeal to increase the visibility of your product to promote sales and enhance profits. Featuring a bottom mounted compressor, the glass door merchandisers effectively keep product at exactly the right temperature while utilizing energy efficiency. The simple to use but precise digital controls allow for accurate and flexible use of the unit. For energy savings, durability, and visually appealing construction, Maxx Cold X Series Merchandisers are sure to be a hit.

- Electronic thermostat and digital LED temperature display for accurate control and easy reading
- CFC free refrigerant and foam
- Self-closing door
- Magnetic gasket
- Double pane glass doors
- Stainless steel interior bottom
- Powder coated steel interior top and sides
- Powder coated steel exterior
- LED lamps

 	Specifications subject to change without notice.
	Approvals:

Plan View

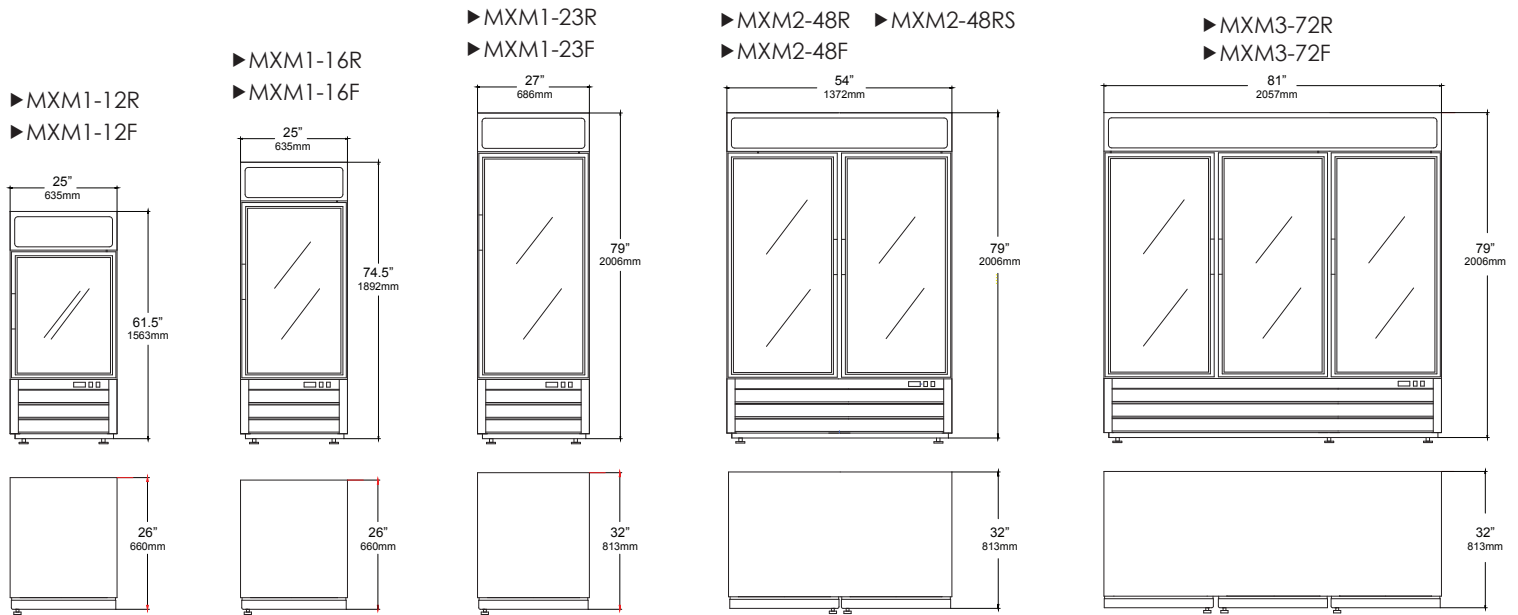

Merchandisers

Specifications

Model	Dim (WxDxH")	Capacity	Hp	Temp	Doors	Weight	Shelves	NEMA Plug (115/60/1 Only)
MXM1-12R	25 x 26 x 61.5 (635x660x1562mm)	12 Cu Ft	3/8	35° to 43°F	1	220 LB 100 KG	3	5-15P
MXM1-12F	25 x 26 x 61.5 (635x660x1562mm)	12 Cu Ft	3/8	-8° to 0° F	1	242 LB 110 KG	3	5-15P
MXM1-16R	25 x 26 x 74.5 (635x660x1892mm)	16 Cu Ft	3/8	35° to 43°F	1	242 LB 110 KG	3	5-15P
MXM1-16F	25 x 26 x 74.5 (635x660x1892mm)	16 Cu Ft	5/8	-8° to 0° F	1	274 LB 124 KG	3	5-15P
MXM1-23R	27 x 32 x 79 (686x813x2006mm)	23 Cu Ft	3/8	35° to 43°F	1	282 LB 128 KG	4	5-15P
MXM1-23F	27 x 32 x 79 (686x813x2006mm)	23 Cu Ft	5/8	-8° to 0° F	1	302 LB 137 KG	4	5-15P
MXM2-48R	54 x 32 x 79 (1372x813x2006mm)	48 Cu Ft	1/2	35° to 43°F	2	447 LB 203 KG	8	5-15P
MXM2-48RS	54 x 32 x 79 (1372x813x2006mm)	48 Cu Ft	1/2	35° to 43°F	2	447 LB 203 KG	8	5-15P
MXM2-48F	54 x 32 x 79 (1372x813x2006mm)	48 Cu Ft	1	-8° to 0° F	2	476 LB 216 KG	8	5-15P
MXM3-72R	81 x 32 x 79 (2057x813x2006mm)	72 Cu Ft	3/4	35° to 43°F	3	616 LB 279.5 KG	12	5-15P
MXM3-72F	81 x 32 x 79 (2057x813x2006mm)	72 Cu Ft	1 1/4	-8° to 0° F	3	704 LB 319.5 KG	12	5-20P