



Project:

Item Number:

Quantity:

Modular Drop-in: Three Well Hot

The Vollrath Company, L.L.C.

MODULAR DROP-IN: THREE WELL HOT



Modular Drop-In: Three Well Hot

DESCRIPTION

The modular drop-in is designed for top-mount installation and does not require hard-wiring. The drop-in comes complete with a 6-ft. (182.8 cm) power cord with plug and a 4-ft. (121.9 cm) control cord for remote installation.

Full-perimeter drip-edge contains spills and condensation within the stainless steel countertop area of the drop-in. Drip-edge adds additional strength to the flange area.

Drop-in can operate wet or dry, however, moist operation is recommended for even heating of the food product. It meets NSF4 performance standards when using moist heat.

High-density glass-fiber insulation allows zero-clearance installation and use of 625W elements for lower energy consumption and reduced costs. Also available with 1000W elements.

Stainless steel wells are 6³/₈" (16.2 cm) deep to allow use of full-size and fractional pans up to 6" (15.2 cm) deep while still providing moist heat. Adaptor bars are recommended when using fractional pans.

WARRANTY: All models shown come with Vollrath's standard warranty against defects in materials and workmanship. For full warranty details, please refer to the Vollrath Equipment and Smallwares Catalog.

Agency Listings



Due to continued product improvement, please consult www.vollrathco.com for current product specifications.

MODELS	1000W Per Well	625W Per Well	Drain	Auto-Fill
120V	3640401	36404	Standard	-
Infinite	3640451	3640450	Manifold	-
Control	3640461	3640460	Manifold	Yes
120V	3640411	3640410	Standard	-
Thermostatic	3640471	3640470	Manifold	-
Control	3640481	3640480	Manifold	Yes
208V		36405	Standard	-
Infinite		3640550	Manifold	-
Control		3640560	Manifold	Yes
208V		3640510	Standard	-
Thermostatic		3640570	Manifold	-
Control		3640580	Manifold	Yes
208-240V	3640501		Standard	-
Infinite	3640551		Manifold	-
Control	3640561		Manifold	Yes
208-240V	3640511		Standard	-
Thermostatic	3640571		Manifold	-
Control	3640581		Manifold	Yes
240V		36473	Standard	-
Infinite		3647350	Manifold	-
Control		3647360	Manifold	Yes
240V		3647310	Standard	-
Thermostatic		3647370	Manifold	-
Control		3647380	Manifold	Yes

FEATURES

- Top is 18-gauge stainless steel, with 3/8" (9.5 mm) overhang on all sides and die-stamped with full-perimeter drip-edge.
- Breaker gasket included for installation under drip-edge.
- Flat work surface around opening.
- Deep drawn well is 20-gauge stainless steel, 6³/₈" (16.2 cm) deep.
- Standard 1000W or 625W heating element.
- Infinite or thermostatic control.
- Power indicator light.
- Standard drain is 1/2" (1.3 cm) stainless steel fitting welded to pan with ball valve shutoff below exterior housing.
- Manifold drain option is 1" (2.5 cm) copper tubing and retains individual well shut-off and adds manifold shutoff.
- Unit insulated on sides, between wells, and below element assembly with high-density glass fiber insulation.
- Exterior housing is 20-gauge galvanized steel.
- Drop-in is supplied with stainless steel control panel connected to bottom of unit for shipping.
- Control panel may remain on unit or be remote mounted.
- Control wires contained in flexible rubber cord.
- Unit comes with cord and plug and does not require hard-wiring installation.
- Positioning clips provided to center drop-in within cutout.
- Standard mounting clips adjustable for up to 3" (7.6 cm) thick counters.
- Full one-year parts and labor warranty.
- Sheet pan adapter available. Item No. 19186.

Approvals	Date



Setting the Standard™

www.vollrathco.com

The Vollrath Company, L.L.C.
 1236 North 18th Street
 Sheboygan, WI 53081-3201 U.S.A.
 Customer Service: 800.628.0830
 Canada Customer Service: 800.695.8560
 Main Fax: 800.752.5620 or 920.459.6573

Technical Services: 800.628.0832
 Technical Services Fax: 920.459.5462

Excell Marketing Group

MODULAR DROP-IN: THREE WELL HOT


AUTO-FILL OPTION

Field-installed option that efficiently maintains a constant water level. Eliminates the need to monitor wells and add water, reducing operating and labor costs. Attaches easily to manifold drain assembly using simple tools. The check valve/siphon prevents cross contamination of drain and potable water lines. NOTE: The auto-fill reservoir is approximately 6 x 17 (15.2 x 43.2) and requires additional space in the cabinet.


DIMENSIONS

- Cutout Dimensions: 27½" x 25¼" (69.9 cm x 64.1 cm). Opening cutout must have a 7/8" (2.2 cm) corner radius.



Dimensions shown in inches (centimeters).

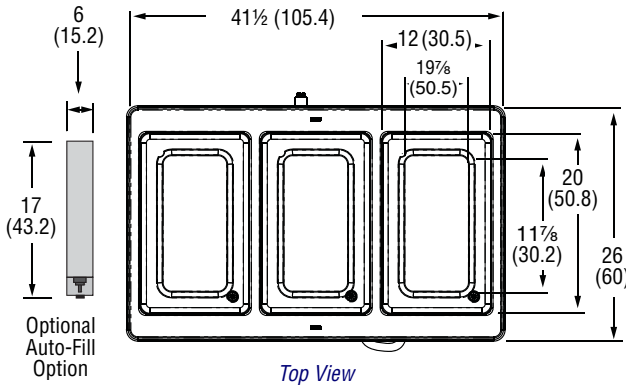



Control Panel Cutout +.063/-0 (+.160/-0) Tolerance

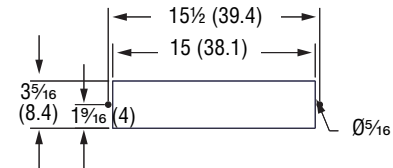


Standard Drain

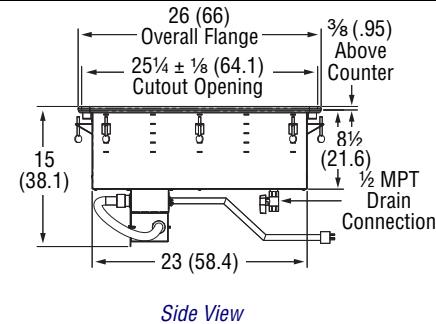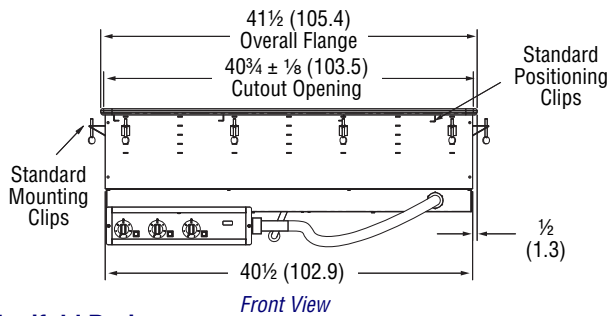

Manifold Drain

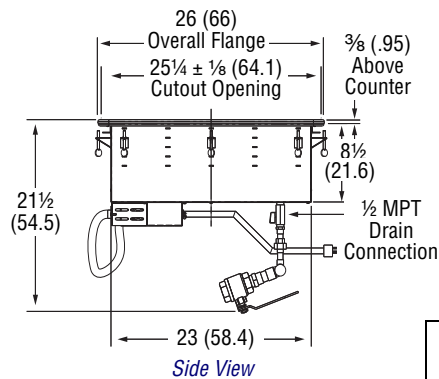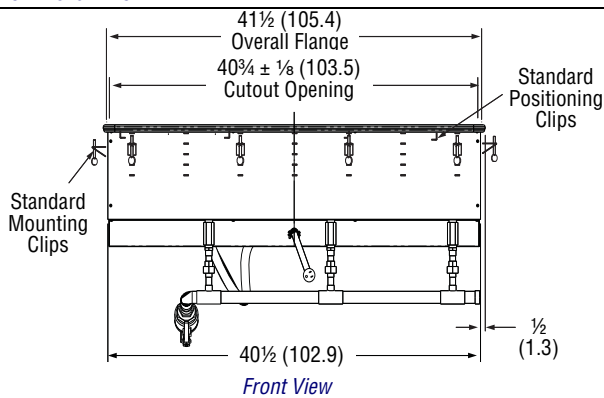

Receptacles



ELECTRICAL SPECIFICATIONS

Model	Watts Per Well	Total Watts	Volts	Nominal Amps	NEMA Plug
36404, 3640450, 3640460, 3640410, 3640470, 3640480	625	1875	120V AC	15.6	5-20P
3640401, 3640451, 3640461, 3640411, 3640471, 3640481	1000	3000	120V AC	25	5-50P
36405, 3640550, 3640560, 3640510, 3640570, 3640580	625	1875	208V AC	9	6-15P
3640501, 3640551, 3640561, 3640511, 3640571, 3640581	1000	2250 - 3000	208 - 240V AC	10.8 - 12.5	6-20P
36473, 3647350, 3647360, 3647310, 3647370, 3647380	625	1875	240V AC	7.8	6-15P



Technical Services: 800.628.0832
Technical Services Fax: 920.459.5462

The Vollrath Company, L.L.C.
1236 North 18th Street
Sheboygan, WI 53081-3201 U.S.A.
Customer Service: 800.628.0830
Canada Customer Service: 800.695.8560
Main Fax: 800.752.5620 or 920.459.6573