



Project:

Item Number:

Quantity:

MODULAR DROP-IN: BAIN MARIE HOT



Modular Drop-in: Bain Marie Hot

DESCRIPTION

The bain marie style is ideal for use with templates and greater than full-size steam table pans.

The modular bain marie drop-in is designed for top-mount installation and does not require hard-wiring. The drop-in comes complete with a 6-ft. (182.8 cm) power cord with plug and a 4-ft. (121.9 cm) control cord for remote installation.

Full-perimeter drip-edge contains spills and condensation within the stainless steel countertop area of the drop-in. Drip-edge adds additional strength to the flange area.

The drop-in operates wet. Moist operation is recommended for even heating of the food product. Meets NSF4 performance standards when using moist heat. Since the bain marie is a steam table unit, fill with up to 1/2" (1.3 cm) of water for proper usage.

High-density, glass-fiber insulation allows zero-clearance installation and 625W elements lower energy consumption and reduce cost.

Stainless steel wells are 6 5/8" (16.8 cm) deep to allow use of full-size and fractional pans up to 6" (15.24 cm) deep while still providing moist heat. Adaptor bars are recommended when using fractional pans.

Note: Modular drop-ins cannot be cancelled or returned.

Agency Listings



Due to continued product improvement, please consult www.vollrathco.com for current product specifications.

MODELS

| Description | Watts | 120V | 208V | 240V |
|-------------|-------|----------|----------|----------|
| | | Item No. | Item No. | Item No. |
| Two-pan | 1250 | 36500 | 36501208 | 36501240 |
| Three-pan | 1875 | 36502 | 36503208 | 36503240 |
| Four-pan | 2500 | - | 36504208 | 36504240 |
| Five-pan | 3125 | - | 36505208 | 36505240 |
| Six-pan | 3750 | - | 36506208 | 36506240 |

FEATURES

- Top is 18-gauge, 300 Series stainless steel, with 3/8" (9.52 mm) overhang on all sides and die-stamped with full-perimeter drip-edge
- Gasket included for installation under drip-edge
- Flat work surface around opening
- Well is 6 5/8" (16.8 cm) deep, 18-gauge, 300 Series stainless steel
- Standard 625W heating element
- Thermostatic control
- Power indicator light
- Standard drain is 1" (2.5 cm) NPT with ball valve shutoff below exterior housing
- Unit insulated on sides and below element assembly with high-density glass fiber insulation
- Exterior housing is 20-gauge galvanized steel
- Drop-in is supplied with stainless steel control panel connected to bottom of unit for shipping
- Control panel may remain on unit or be remote mounted
- Control wires contained in flexible rubber cord
- Unit comes with cord and plug and does not require hard-wiring installation
- Positioning clips provided to center drop-in within cutout
- Standard mounting clips adjustable for up to 3" (7.6 cm) thick counters
- 6-ft. (182.8 m) cord with plug
- Full one-year parts and labor warranty
- Miramar™ templates available

WARRANTY: All models shown come with Vollrath's standard warranty against defects in materials and workmanship. For full warranty details, please refer to the Vollrath Equipment and Smallwares Catalog.

| Approvals | Date |
|-----------|------|
| | |

Modular Drop-in: Bain Marie Hot

The Vollrath Company, L.L.C.



Setting the Standard™

www.vollrathco.com


The Vollrath Company, L.L.C.
1236 North 18th Street
Sheboygan, WI 53081-3201 U.S.A.
Customer Service: 800.628.0830
Canada Customer Service: 800.695.8560
Main Fax: 800.752.5620 or 920.459.6573

Technical Services: 800.628.0832
Technical Services Fax: 920.459.5462

Excell Marketing Group




MODULAR DROP-IN: BAIN MARIE HOT

DIMENSIONS: Shown in inches (centimeters).

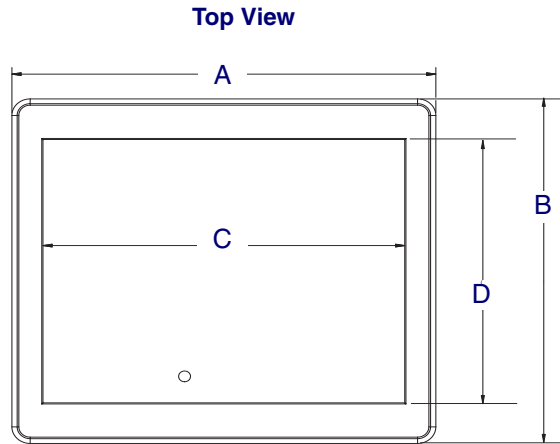

| Item No. | (A) Overall Length | (B) Overall Width | (C) Well Length | (D) Well Width | (E) Base Length | (F) Base Width | Cutout Length | Cutout Width | | |
|----------|---|-------------------|---|---|---|---|---|--|---|---|
| 36500 | 29 (73.7) | 26 (66) | 24 ³ / ₄ (62.9) | 19 ⁷ / ₈ (50.5) | 27 ¹ / ₄ (69.2) | 22 (55.8) | 27 ¹ / ₂ (70.5) | 24 ³ / ₄ (62.9) | | |
| 36501208 | | | 37 ¹ / ₂ (95.3) | | 40 ¹ / ₂ (102.9) | | | | 41 (104.1) | |
| 36501240 | | | | | | | | | | 50 ¹ / ₄ (127.6) |
| 36502 | 63 (160) | | | | | | 67 (170.2) | | | |
| 36503208 | | | 75 ³ / ₄ (192.4) | | 80 ¹ / ₄ (203.8) | | | | 80 ³ / ₄ (205.1) | |
| 36503240 | | | | | | | | | | 54 ³ / ₄ (139.1) |
| 36504208 | 68 (172.7) | | | | | | 71 (180.3) | | | |
| 36504240 | | | 81 ¹ / ₄ (206.4) | | 84 (213.3) | | | | 84 ¹ / ₂ (215.1) | |
| 36505208 | | | | | | | | | | 81 ¹ / ₄ (206.4) |
| 36505240 | 81 ¹ / ₄ (206.4) | 84 (213.3) | | 84 ¹ / ₂ (215.1) | | | | | | |
| 36506208 | | | 81 ¹ / ₄ (206.4) | | 84 (213.3) | 84 ¹ / ₂ (215.1) | | | | |
| 36506240 | | | | | | | 81 ¹ / ₄ (206.4) | 84 (213.3) | 84 ¹ / ₂ (215.1) | |


Opening cutout must have 7/8" (2.2 cm) corner radius.

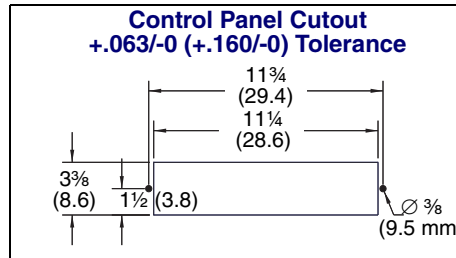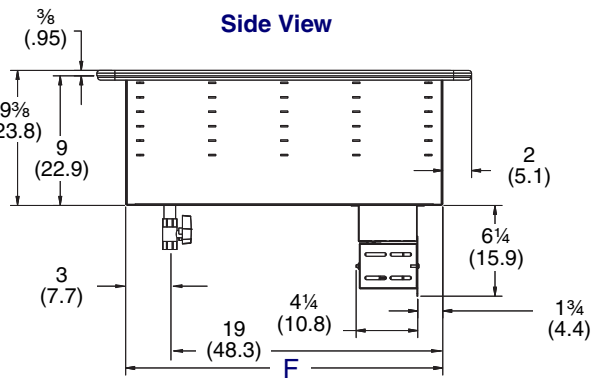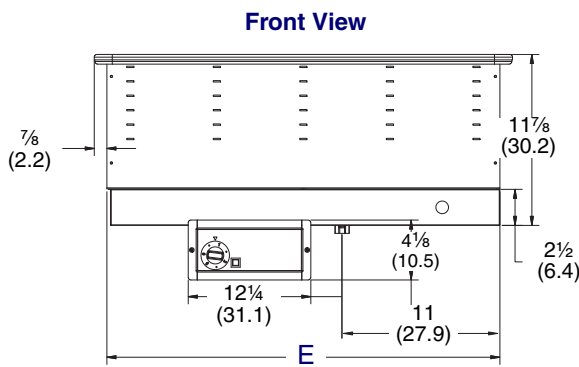

ELECTRICAL SPECIFICATIONS

| Description | Item No. | Total Watts | Volts | Amps | NEMA Plug |
|-------------|----------|-------------|-------|------|-----------|
| Two-pan | 36500 | 1250 | 120 | 10.4 | 5-15P |
| | 36501208 | | 208 | 6 | 6-15P |
| | 36501240 | | 240 | 5.2 | 6-15P |
| Three-pan | 36502 | 1875 | 120 | 15.6 | 5-20P |
| | 36503208 | | 208 | 9 | 6-15P |
| | 36503240 | | 240 | 7.8 | 6-15P |
| Four-pan | 36504208 | 2500 | 208 | 12 | 6-20P |
| | 36504240 | | 240 | 10.4 | 6-15P |
| Five-pan | 36505208 | 3125 | 208 | 15 | 6-20P |
| | 36505240 | | 240 | 13 | 6-20P |
| Six-pan | 36506208 | 3750 | 208 | 18 | 6-30P |
| | 36506240 | | 240 | 15.6 | 6-20P |

Receptacles

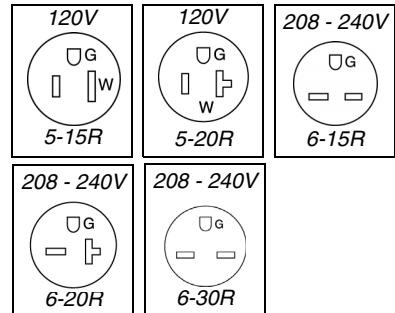

www.vollrathco.com

The Vollrath Company, L.L.C.
1236 North 18th Street
Sheboygan, WI 53081-3201 U.S.A.
Customer Service: 800.628.0830
Canada Customer Service: 800.695.8560
Main Fax: 800.752.5620 or 920.459.6573

Technical Services: 800.628.0832
Technical Services Fax: 920.459.5462