



Over 90 Years Of Quality Foodservice
Products And Service

Job _____ Item No. _____

MOD100 Series 12" X 20" Single -Well Heavy Duty, Top-Mount, Rectangular Drop-In Food-Warmers



Model MOD100

DESCRIPTION

Wells heavy-duty, top-mount, drop-in, Modular food warmers are designed to hold heated foods at safe and fresh serving temperatures. Wells MOD100 Series accommodates one 12" X 20" standard food pans or equivalent fractional inset pans and are designed for wet or dry operation.

SPECIFICATIONS

Construction – One-piece stainless steel top flange and heavy-gauge, deep-drawn stainless steel warming pans are standard features on all models. Wellslocks are standard for quick and easy installation.

Insulation – Sides, front, back and bottom are fully insulated for energy savings, efficiency, quicker pre-heat and faster recovery.

Controls & Heating- Individual controls for each well provide maximum versatility. Models with thermostatic or infinite controls are available. High-limits prevent overheating. Temperature-ready indicator lights are standard on all control types. Powerful tubular heating elements are located under the warming pans for quick and efficient heating and for even heat distribution.

Additional Features Available

- Auto water-fill to maintain proper water level.
- Select models are field convertible from 3Ø to 1Ø
- Drains
- Drains with manifolds
- Cord & plugs available on thermostatically control models
- Infinite or thermostatic controls

STANDARD FEATURES

- Accommodates one 12" X 20" standard inset pans or equivalent fractional pans
- One-piece stainless steel top flange and heavy-gauge, deep-drawn stainless steel warming pans
- Suitable for wet or dry operation (wet recommended for best results)
- Energy-saving fully-insulated construction
- Fully insulated models are perfect for non-metal counters
- Thermostatic or infinite controls
- Separate controls for each individual wells
- High limits prevent overheating
- Thermostatic controls are recessed in a one-piece, drawn, front-mounted panel
- Wellslock standard for ease of installation
- Powerful tubular heating elements
- ½" drains and manifolds available
- Cords & plugs available
- 2-Year Limited Parts & 1-Year Limited Labor Warranty

OPTIONS & ACCESSORIES

- Adaptor tops for round insets
- Inset with lid
- 8oz. soup ladle
- Drain value extension kit
- Drain screens
- Wellslok extension kits for wood counter installations
- 6' cords and plugs are available on all 120V models
- 6" cords and plugs are available on all 208/240V models
- Optional 72" wiring

CERTIFICATIONS



Sheet No. MOD1-11/12



Wells Bloomfield • 10 Sunnen Dr. St. Louis, MO 63143 U.S.A.

Phone : (314) 678-6314 • Fax (314) 781-5445


www.wellsbloomfield.com © 2012 Wells Bloomfield • Printed in the U.S.A.

NOTE: Specifications are subject to change without notice and are not intended for installation purposes. See installation instructions prior to installing the unit.



Over 90 Years Of Quality Foodservice Products And Service

MOD100 Series 12" X 20" Single -Well Heavy Duty, Top-Mount, Rectangular Drop-In Food-Warmers

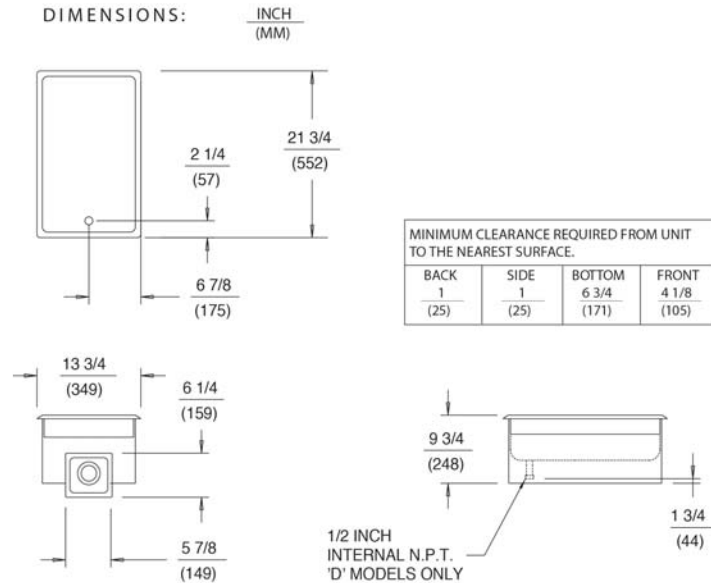

NOTE: Specifications are subject to change without notice and are not intended for installation purposes. See installation instructions prior to installing the unit.

| SPECIFICATIONS | | | | | | | | | | | | | | |
|----------------|---|-----------|----------------|-------|----------------------------|----------------------------|---|--|----------------------------|---|--|------------------------------|--------------------------------------|-----------|
| Model Number | Description | Volts | Watts Per Well | Phase | Standard Power Cord Supply | Optional Power Cord Supply | OVERALL Width Left to Right Inches (MM) | OVERALL Length Front to Back Inches (MM) | OVERALL Height Inches (MM) | CONTROL PANEL Width Front to Back Inches (MM) | CONTROL PANEL Height Left to Right Inches (MM) | Shipping Weights Pounds (KG) | Crate Size Cubic Feet (Cubic Meters) | Approvals |
| MOD100-120 | Infinite Controls no Drains | 120V | 1200 | 1Ø | N/A | NEMA 5-15P | 13-3/4 (349) | 21-3/4 (552) | 9-3/4 (248) | 5-7/8 (149) | 6-1/4 (159) | 24 (10.9) | 4.5 (0.128) | NSF UL |
| MOD100 | Infinite Controls no Drains | 208/240V | 900/1200 | 1Ø | N/A | NEMA 6-15P | 13-3/4 (349) | 21-3/4 (552) | 9-3/4 (248) | 5-7/8 (149) | 6-1/4 (159) | 24 (10.9) | 4.5 (0.128) | NSF UL |
| MOD100CSA | Infinite Controls no Drains | 120V 240V | 1200 | 1Ø | N/A | Not Available | 13-3/4 (349) | 21-3/4 (552) | 9-3/4 (248) | 5-7/8 (149) | 6-1/4 (159) | 24 (10.9) | 4.5 (0.128) | NSF SP |
| MOD100D-120 | Infinite Controls with Drains | 120V | 1200 | 1Ø | N/A | NEMA 5-15P | 13-3/4 (349) | 21-3/4 (552) | 9-3/4 (248) | 5-7/8 (149) | 6-1/4 (159) | 24 (10.9) | 4.5 (0.128) | NSF UL |
| MOD100D | Infinite Controls with Drains | 208/240V | 900/1200 | 1Ø | N/A | NEMA 6-15P | 13-3/4 (349) | 21-3/4 (552) | 9-3/4 (248) | 5-7/8 (149) | 6-1/4 (159) | 24 (10.9) | 4.5 (0.128) | NSF UL |
| MOD100T-120 | Thermostatic Controls no Drains | 120V | 1650 | 1Ø | NONE | NEMA 5-15P | 13-3/4 (349) | 21-3/4 (552) | 9-3/4 (248) | 5-7/8 (149) | 6-1/4 (159) | 24 (10.9) | 4.5 (0.128) | NSF UL |
| MOD100T | Thermostatic Controls no Drains | 208/240V | 1240/1650 | 1Ø | NONE | NEMA 6-15P | 13-3/4 (349) | 21-3/4 (552) | 9-3/4 (248) | 5-7/8 (149) | 6-1/4 (159) | 24 (10.9) | 4.5 (0.128) | NSF UL |
| MOD100T-230 | Thermostatic Controls no Drains | 220-240V | 1650 | 1Ø | NONE | Not Available | 13-3/4 (349) | 21-3/4 (552) | 9-3/4 (248) | 5-7/8 (149) | 6-1/4 (159) | 24 (10.9) | 4.5 (0.128) | CE |
| MOD100TD-120 | Thermostatic Controls with Drains | 120V | 1650 | 1Ø | NONE | NEMA 5-15P | 13-3/4 (349) | 21-3/4 (552) | 9-3/4 (248) | 5-7/8 (149) | 6-1/4 (159) | 24 (10.9) | 4.5 (0.128) | NSF UL |
| MOD100TD | Thermostatic Controls with Drains | 208/240V | 1240/1650 | 1Ø | NONE | NEMA 6-15P | 13-3/4 (349) | 21-3/4 (552) | 9-3/4 (248) | 5-7/8 (149) | 6-1/4 (159) | 24 (10.9) | 4.5 (0.128) | NSF UL |
| MOD100TD-230 | Thermostatic Controls with Drains | 220/240V | 1650 | 1Ø | NONE | Not Available | 13-3/4 (349) | 21-3/4 (552) | 9-3/4 (248) | 5-7/8 (149) | 6-1/4 (159) | 24 (10.9) | 4.5 (0.128) | CE |
| MOD100TDAF | Thermostatic Controls with Drains and Auto-Fill | 208/240V | 1240/1650 | 1Ø | NONE | NEMA 6-15P | 13-3/4 (349) | 21-3/4 (552) | 9-3/4 (248) | 14 (356) | 6-1/4 (159) | 30 (13.6) | 4.5 (0.128) | NSF UL |

Cords and plugs are available on all 120V and on all 208/240V models (optional)

AutoFill models require a water connection. Please refer to the operator's manual and installation instructions for details.

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While Wells exercises good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.



Wells Bloomfield • 10 Sunnen Dr. St. Louis, MO 63143 U.S.A.
Phone : (314) 678-6314 • Fax (314) 781-5445
www.wellsbloomfield.com © 2012 Wells Bloomfield • Printed in the U.S.A.

NOTE: Specifications are subject to change without notice and are not intended for installation purposes. See installation instructions prior to installing the unit.